


SLC1
SLC2
SLC3

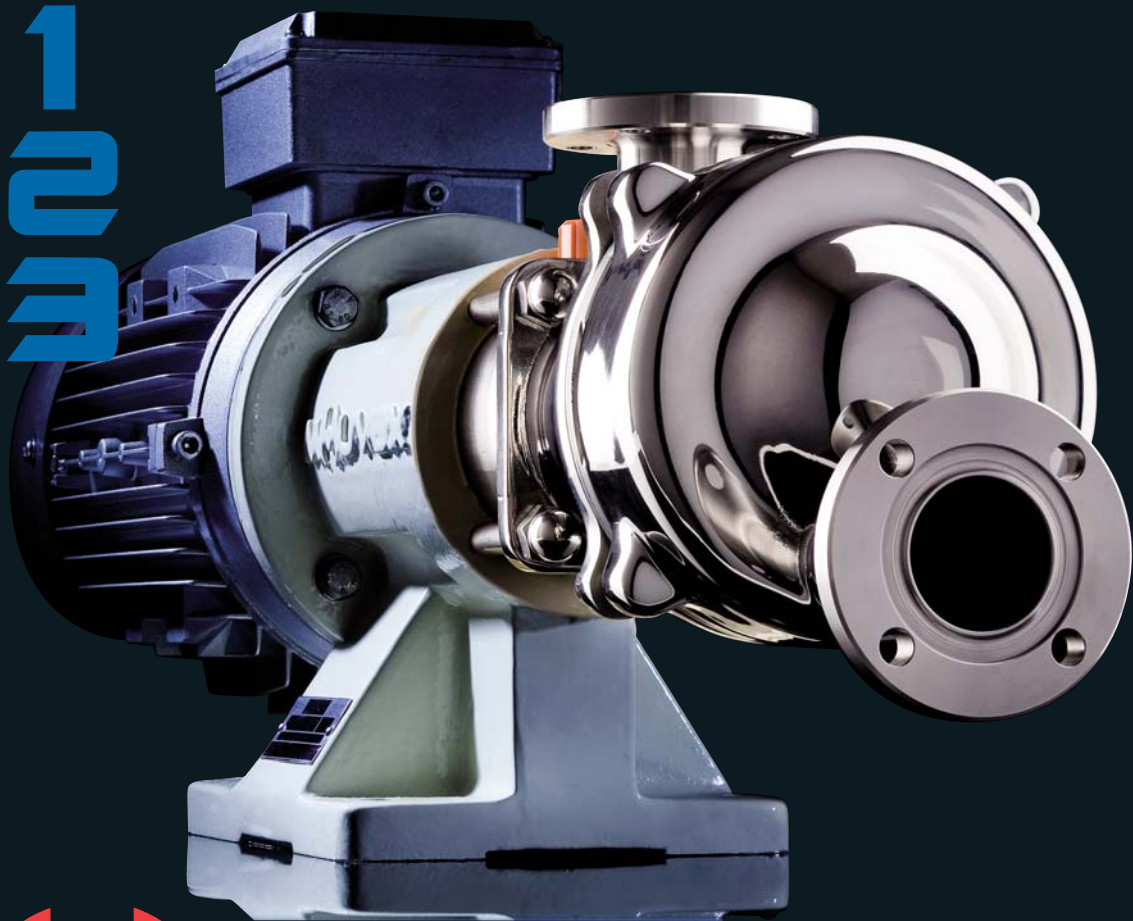

BY

MOUVEX
BLACKMER
A DOVER COMPANY

THE **S**EAL **L**ESS PUMP SPECIALIST

No magnets

No mechanical seal

No packing




ATEX

TA Luft



Eccentric disc Mouvex technology

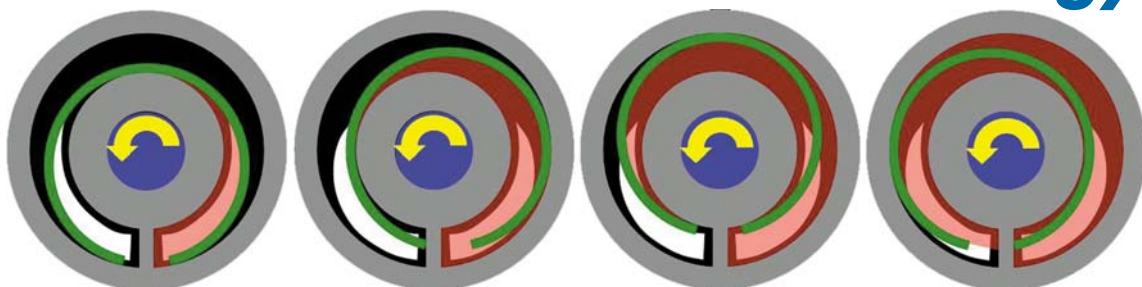

Constant volumetric efficiency
Low shear rate
High vacuum & compression effect

Self priming
Dry running up to 10 minutes
Constant performance overtime

Seal Less design



Shaft sealing by double stainless steel bellows
Easier and reduced maintenance
Reduced number of components

All stainless steel construction
Ra 0.8 wetted surfaces



Pump Model	Maximum speed	Maximum flow rate	Maximum differential pressure
SLC1	1000 rpm	1 m ³ /h / 4.4 GPM	16 bar / 232 psi
SLC2	1000 rpm	2 m ³ /h / 8.8 GPM	10 bar / 145 psi
SLC3	1000 rpm	3 m ³ /h / 13.2 GPM	6 bar / 87 psi